


Suitability for outdoor use of different combinations between polyurethane Decoral System® Powder coatings and heat transfer film Decoral System® must be assessed on [www.decoral-system.com](http://www.decoral-system.com). (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.



*Powder Coating: MirrorL-183S + Heat Transfer Film: 5014/06*

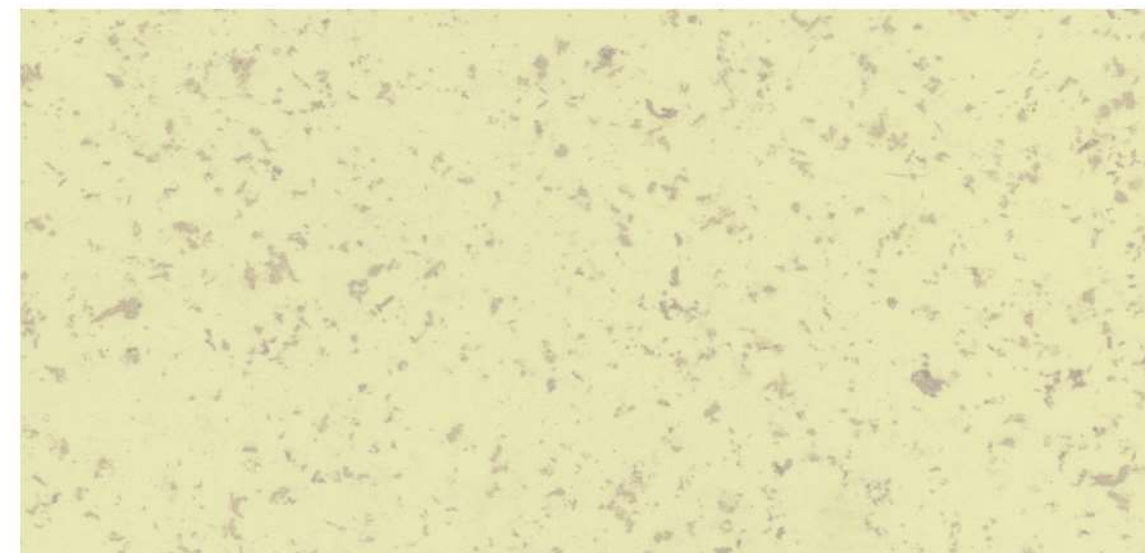


*Powder Coating: DS 752 + Heat Transfer Film: 5014/06*




*Powder Coating: Mirror-058S + Heat Transfer Film: 5014/10*



*Powder Coating: Mirror-045S + Heat Transfer Film: 5014/10*

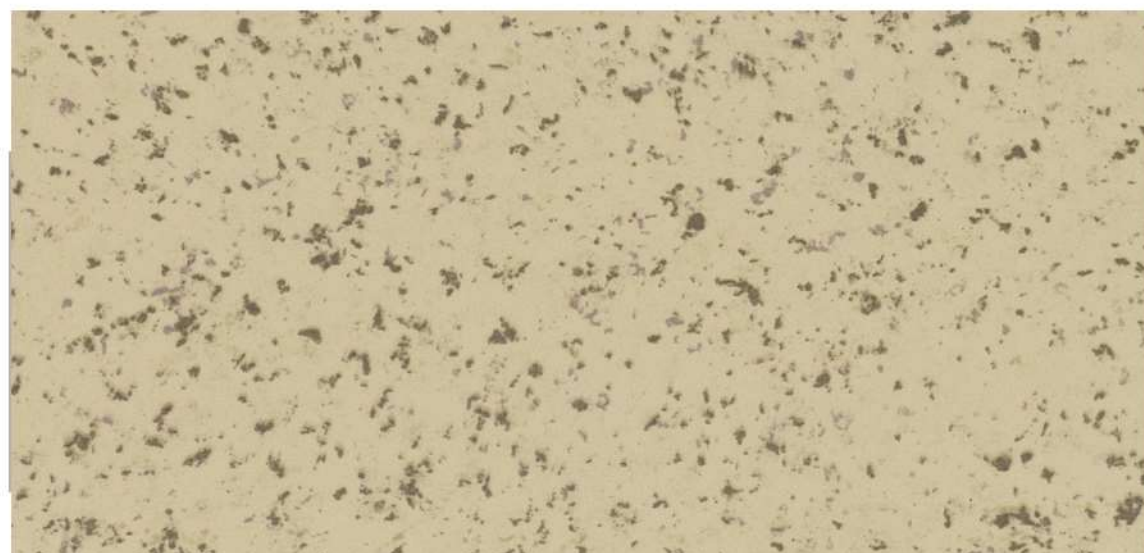

*Powder Coating: 8G-233-A005 + Heat Transfer Film: 5014/12*

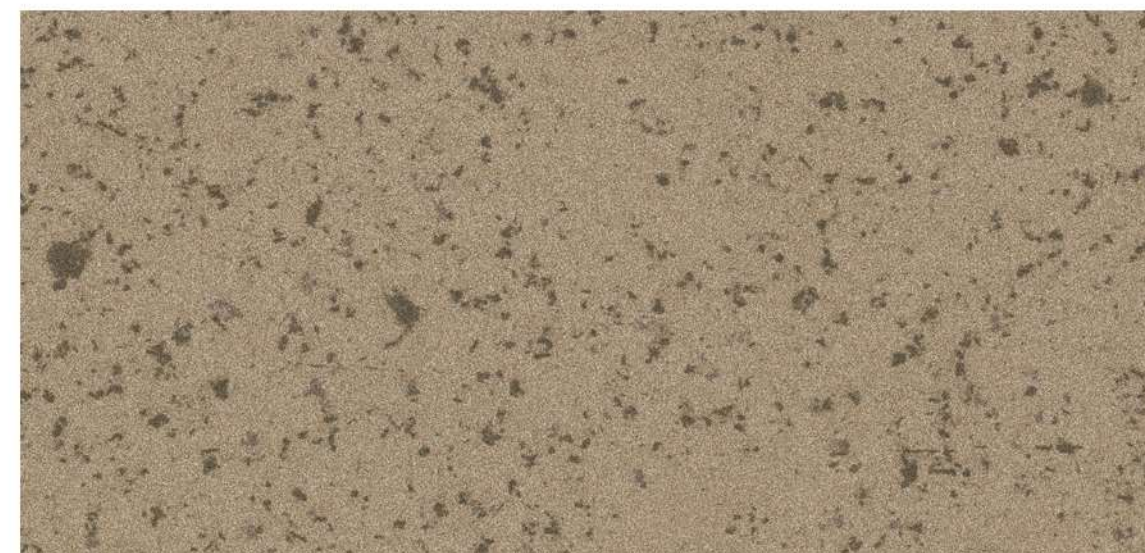

*Powder Coating: Mirror-030S + Heat Transfer Film: 5014/12*

L' idoneità all'impiego in esterno degli abbinamenti tra prodotti vernicianti poliuretani Decoral System® e film sublimatici Decoral System® dovrà essere valutata sul sito internet [www.decoral-system.com](http://www.decoral-system.com) (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**118**

Laboratory Test No. 545 Device: QSun 3000 Total duration: 1102 h

LAB ID NUMBER: 44749  
POWDER COATING: Mirror-1806  
HEAT TRANSFER FILM: 501406  
Colour Variation (ΔE): 0,24  
residual gloss: 96%

**Technical Remarks**  
Excellent residual gloss and low colour variation (ΔE), after 1102 hours.

**Technical Opinion**  
Suitable for  
**OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_4603 Laboratory Decoral System Date: 19/06/2019 ID Report: TR-IA-118-2019

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**115**

Laboratory Test No. 545 Device: QSun 3000 Total duration: 1102 h

LAB ID NUMBER: 44727  
POWDER COATING: Mirror-0455  
HEAT TRANSFER FILM: 501410  
Colour Variation (ΔE): 0,26  
residual gloss: 95%

**Technical Remarks**  
Excellent residual gloss and low colour variation (ΔE), after 1102 hours.

**Technical Opinion**  
Suitable for  
**OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_4603 Laboratory Decoral System Date: 19/06/2019 ID Report: TR-IA-115-2019

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**114**

Laboratory Test No. 545 Device: QSun 3000 Total duration: 1102 h

LAB ID NUMBER: 44722  
POWDER COATING: Mirror-0305  
HEAT TRANSFER FILM: 501412  
Colour Variation (ΔE): 0,48  
residual gloss: 100%

**Technical Remarks**  
Excellent residual gloss and low colour variation (ΔE), after 1102 hours.

**Technical Opinion**  
Suitable for  
**OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_4603 Laboratory Decoral System Date: 19/06/2019 ID Report: TR-IA-114-2019

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**117**

Laboratory Test No. 545 Device: QSun 3000 Total duration: 1102 h

LAB ID NUMBER: 44725  
POWDER COATING: Mirror-0595  
HEAT TRANSFER FILM: 501410  
Colour Variation (ΔE): 0,26  
residual gloss: 96%

**Technical Remarks**  
Excellent residual gloss and low colour variation (ΔE), after 1102 hours.

**Technical Opinion**  
Suitable for  
**OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_4603 Laboratory Decoral System Date: 19/06/2019 ID Report: TR-IA-117-2019

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**116**

Laboratory Test No. 545 Device: QSun 3000 Total duration: 1102 h

LAB ID NUMBER: 44742  
POWDER COATING: DB 752  
HEAT TRANSFER FILM: 501406  
Colour Variation (ΔE): 0,46  
residual gloss: 97%

**Technical Remarks**  
Excellent residual gloss and low colour variation (ΔE), after 1102 hours.

**Technical Opinion**  
Suitable for  
**OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_4603 Laboratory Decoral System Date: 19/06/2019 ID Report: TR-IA-116-2019

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**113**

Laboratory Test No. 545 Device: QSun 3000 Total duration: 1102 h

LAB ID NUMBER: 44719  
POWDER COATING: SO-203-A025  
HEAT TRANSFER FILM: 501412  
Colour Variation (ΔE): 0,87  
residual gloss: 100%

**Technical Remarks**  
Excellent residual gloss and low colour variation (ΔE), after 1102 hours.

**Technical Opinion**  
Suitable for  
**OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_4603 Laboratory Decoral System Date: 19/06/2019 ID Report: TR-IA-113-2019