





Powder Coating: SALT LAKE-028 + Heat Transfer Film: 2904/01



Powder Coating: DS 0702IS + Heat Transfer Film: 2904/01

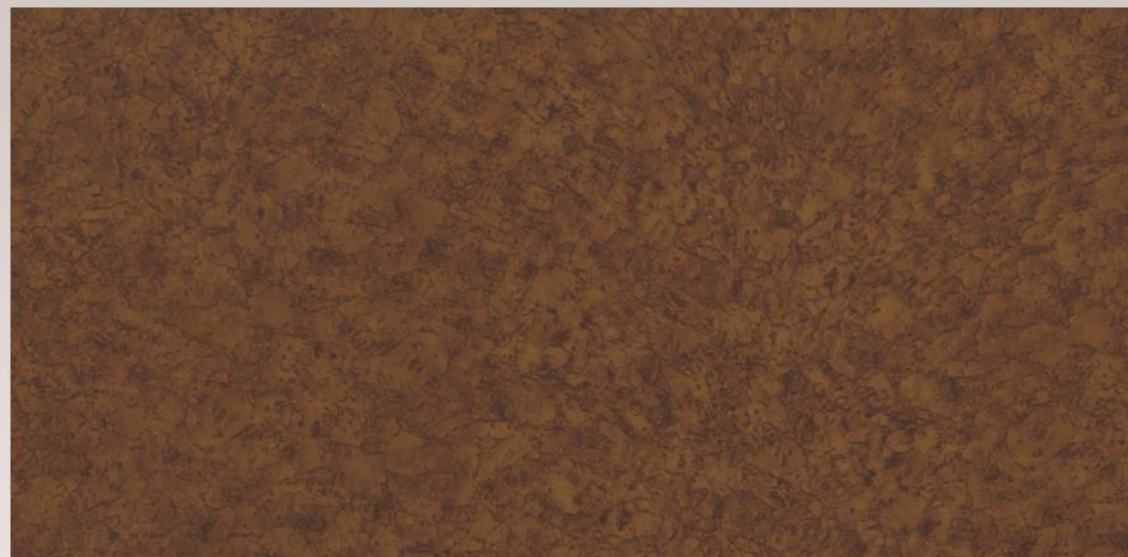


Powder Coating: DS 421 + Heat Transfer Film: 2904/02

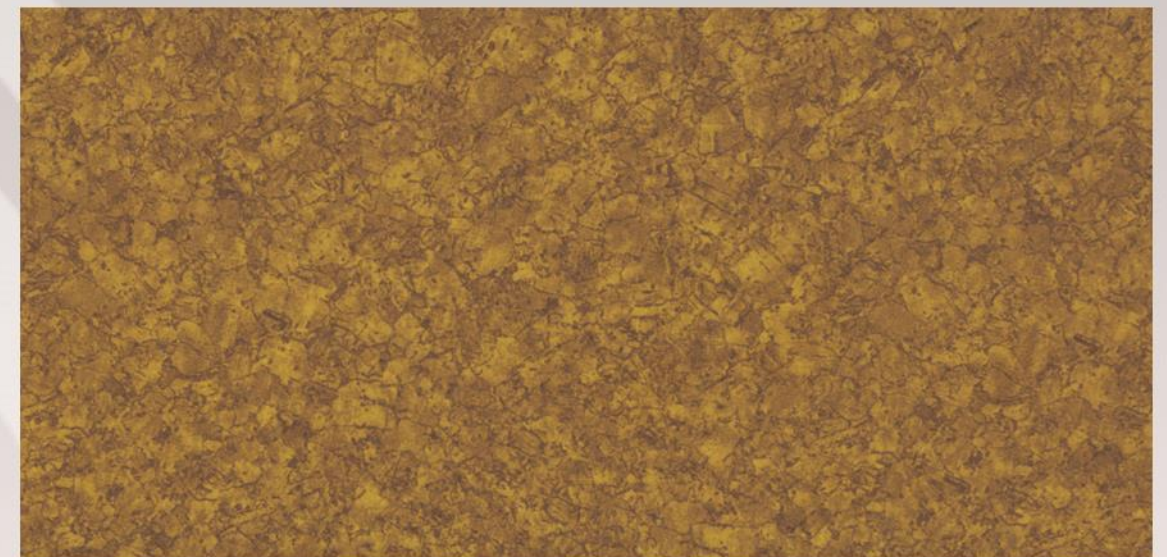

Powder Coating: ICETOUCH-007 + Heat Transfer Film: 2904/02



Powder Coating: DS 0703IS + Heat Transfer Film: 2904/02

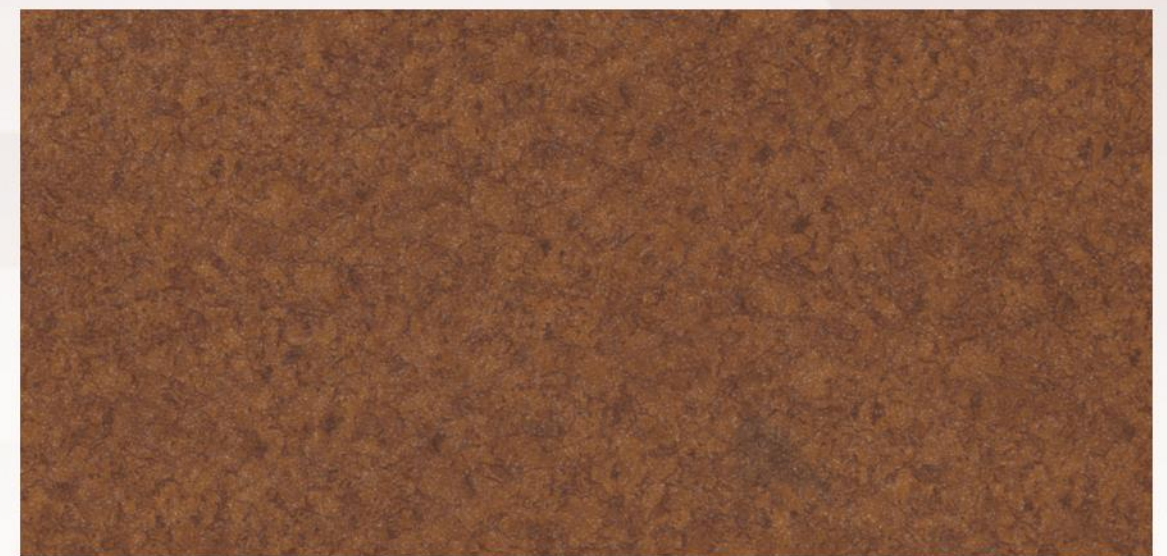





Powder Coating: DS 0725IS + Heat Transfer Film: 2904/02


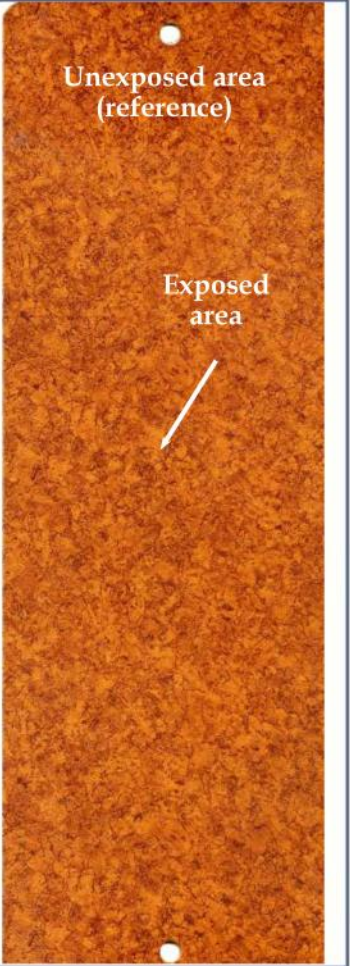



NEW
 PROPOSALS



EFFETTO SUGHERO

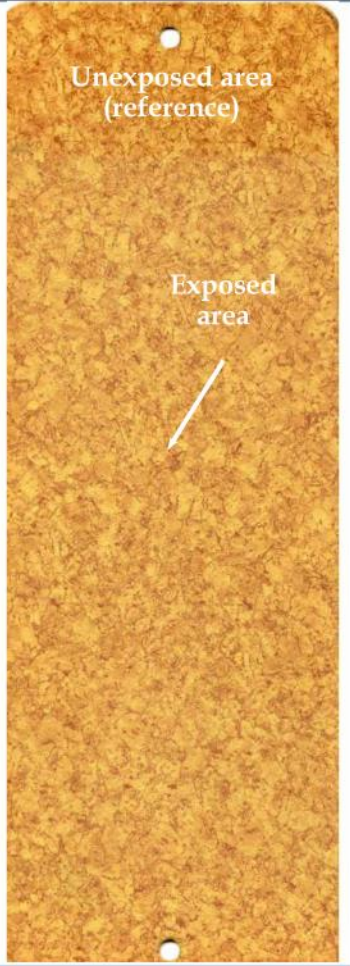Test Report: Florida Natural Exposure		Decoral LAB Research and Development	24
 Florida Test	 Total duration: 12 months	 <p>Unexposed area (reference)</p> <p>Exposed area</p>	
 EXPOSURE PERIOD: FROM: 27/11/2015 TO: 19/12/2016			
LAB. ID NUMBER: 38455 POWDER COATING: DS-0702IS HEAT TRANSFER FILM: 2904/01 Colour variation (ΔE): 2,52 residual gloss: 90%			
Technical Remarks Excellent residual gloss and low colour variation (ΔE)			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.			
QUALICOAT REQUIREMENTS The residual gloss shall be at least 50% of the original gloss. The ΔE values shall not exceed the maximum values prescribed in the annexed table (see Appendix A7 of Qualicoat Specifications).			
Mod_TR_02_rev02		Laboratory Decoral System	Date: 23/02/2017 ID Report: TR-NE-24-2017

Test Report: Florida Natural Exposure		Decoral LAB Research and Development	25
 Florida Test	 Total duration: 12 months	 <p>Unexposed area (reference)</p> <p>Exposed area</p>	
 EXPOSURE PERIOD: FROM: 27/11/2015 TO: 19/12/2016			
LAB. ID NUMBER: 38472 POWDER COATING: DS-0725IS HEAT TRANSFER FILM: 2904/02 Colour variation (ΔE): 2,41 residual gloss: 100%			
Technical Remarks Excellent residual gloss and low colour variation (ΔE)			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.			
QUALICOAT REQUIREMENTS The residual gloss shall be at least 50% of the original gloss. The ΔE values shall not exceed the maximum values prescribed in the annexed table (see Appendix A7 of Qualicoat Specifications).			
Mod_TR_02_rev02		Laboratory Decoral System	Date: 23/02/2017 ID Report: TR-NE-25-2017

Test Report: Florida Natural Exposure		Decoral LAB Research and Development	28
 Florida Test	 Total duration: 12 months	 <p>Unexposed area (reference)</p> <p>Exposed area</p>	
 EXPOSURE PERIOD: FROM: 27/11/2015 TO: 19/12/2016			
LAB. ID NUMBER: 38369 POWDER COATING: DS 421 HEAT TRANSFER FILM: 2904/02 Colour variation (ΔE): 1,91 residual gloss: 88%			
Technical Remarks Excellent residual gloss and low colour variation (ΔE)			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.			
QUALICOAT REQUIREMENTS The residual gloss shall be at least 50% of the original gloss. The ΔE values shall not exceed the maximum values prescribed in the annexed table (see Appendix A7 of Qualicoat Specifications).			
Mod_TR_02_rev02		Laboratory Decoral System	Date: 23/02/2017 ID Report: TR-NE-28-2017