




Suitability for outdoor use of different combinations between polyurethane Decorall System® Powder coatings and heat transfer film Decorall System® must be assessed on [www.decorall-system.com](http://www.decorall-system.com). (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.

# AGED WOOD

L' idoneità all'impiego in esterno degli abbinamenti tra prodotti vernicianti poliuretanici Decorall System® e film sublimatici Decorall System® dovrà essere valutata sul sito internet [www.decorall-system.com](http://www.decorall-system.com) (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.

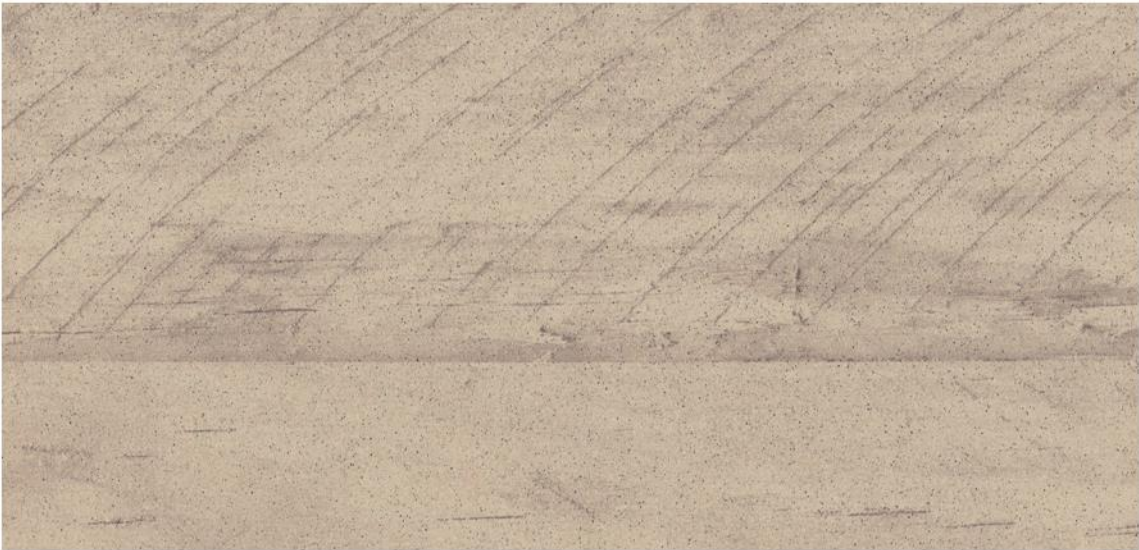

*Powder Coating: 8G-015-A009 + Heat Transfer Film: 2120/03*




*Powder Coating:  
8G-015-A009*




*Powder Coating: 8G-148-A009 + Heat Transfer Film: 2504/12*




*Powder Coating:  
8G-148-A009*

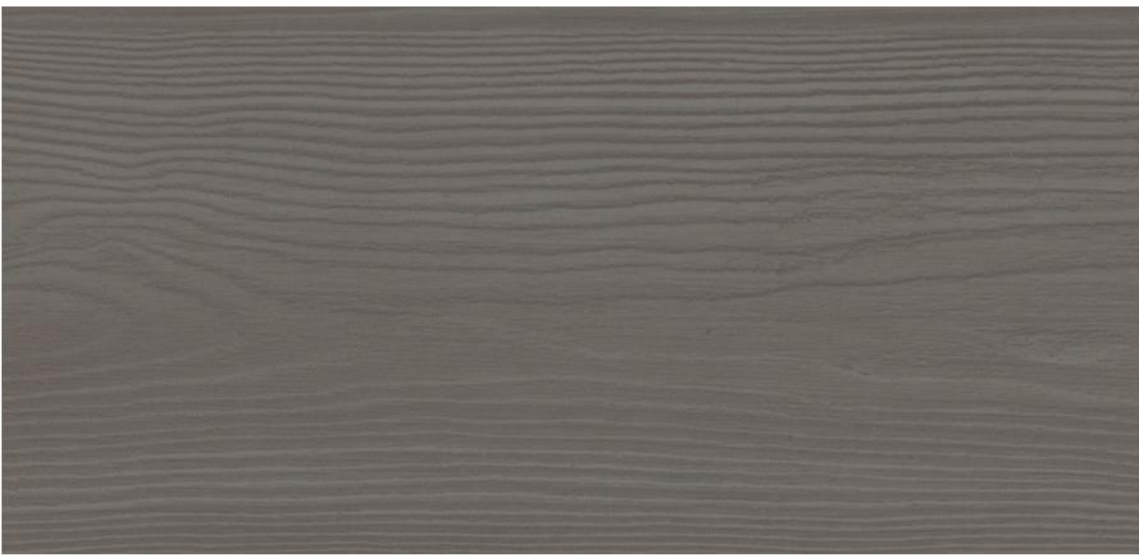

*Powder Coating: 8G-040-A005 + Heat Transfer Film: 2117/13*

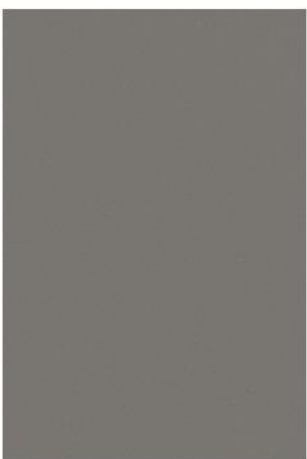

*Powder Coating:  
8G-040-A005*

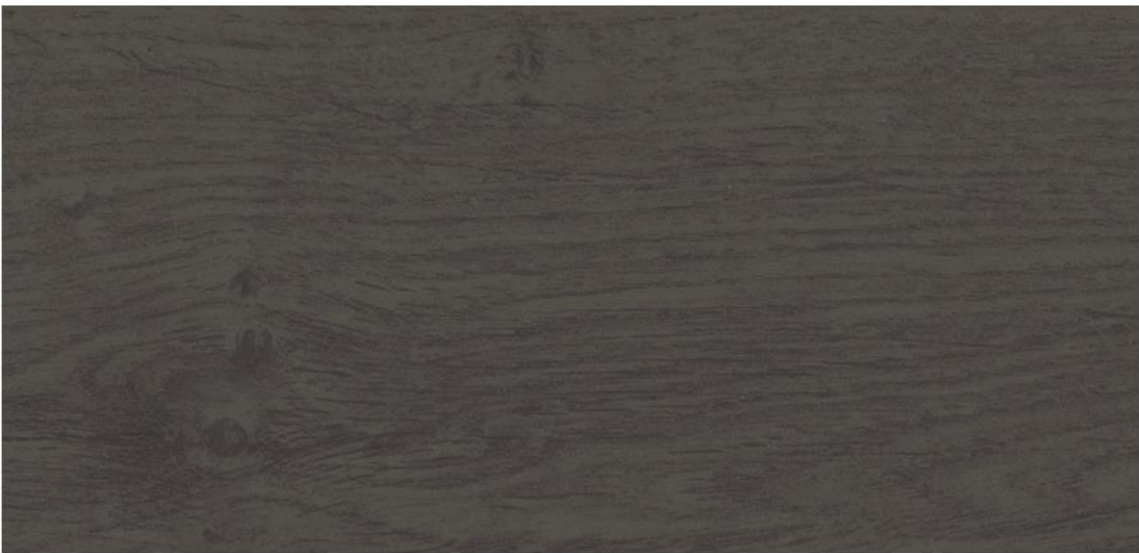

*Powder Coating: 8G-174-A005 + Heat Transfer Film: 2504/10*





*Powder Coating:  
8G-174-A005*





# AGED WOOD

DECORAL-SYSTEM.COM

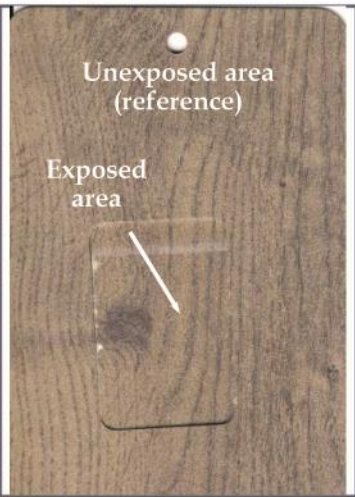Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		63	
Laboratory Test	No. 466	Device: Sol 3000e	Total duration: 1054 h		
					
LAB. ID NUMBER: 40003 POWDER COATING: 8G-148-A009 HEAT TRANSFER FILM: 2504/12 Colour Variation (ΔE): 1,69 residual gloss: 89%					
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1054 hours.				Technical Opinion: <b>Suitable for OUTDOOR USE</b>	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03   Laboratory Decoral System   Date: 20/07/2016   ID Report: TR-IA-63-2016					

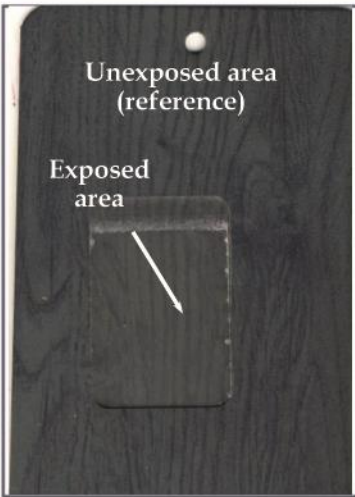Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		64	
Laboratory Test	No. 466	Device: Sol 3000e	Total duration: 1054 h		
					
LAB. ID NUMBER: 40005 POWDER COATING: 8G-174-A005 HEAT TRANSFER FILM: 2504/10 Colour Variation (ΔE): 0,24 residual gloss: 55%					
Technical Remarks Sufficient residual gloss and low colour variation (ΔE), after 1054 hours.				Technical Opinion: <b>Suitable for OUTDOOR USE</b>	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03   Laboratory Decoral System   Date: 20/07/2016   ID Report: TR-IA-64-2016					

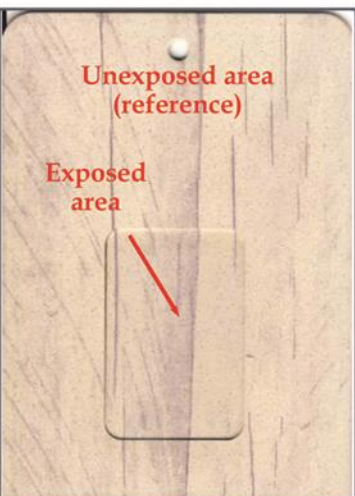Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		96	
Laboratory Test	No. 471	Device: Sol 3000RHN	Total duration: 1313 h		
					
LAB. ID NUMBER: 40158 POWDER COATING: 8G-015-A009 HEAT TRANSFER FILM: 2120/03 Colour Variation (ΔE): 1,68 residual gloss: 84%					
Technical Remarks Good residual gloss and low colour variation (ΔE), after 1313 hours.				Technical Opinion: <b>Suitable for OUTDOOR USE</b>	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03   Laboratory Decoral System   Date: 19/10/2016   ID Report: TR-IA-96-2016					

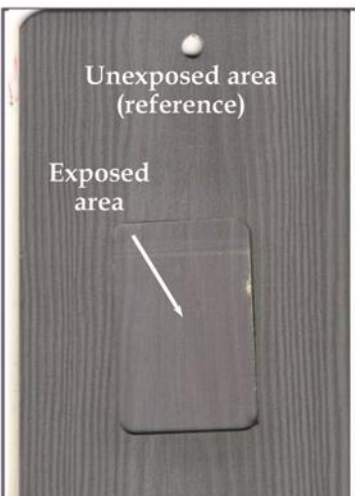Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		97	
Laboratory Test	No. 471	Device: Sol 3000RHN	Total duration: 1313 h		
					
LAB. ID NUMBER: 40159 POWDER COATING: 8G-040-A005 HEAT TRANSFER FILM: 2117/13 Colour Variation (ΔE): 2,01 residual gloss: 57%					
Technical Remarks Sufficient residual gloss and low colour variation (ΔE), after 1313 hours.				Technical Opinion: <b>Suitable for OUTDOOR USE</b>	
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.					
Mod_TR_01_rev03   Laboratory Decoral System   Date: 19/10/2016   ID Report: TR-IA-97-2016					