



Suitability for outdoor use of different combinations between **polyurethane Decoral System® Powder coatings** and **heat transfer film Decoral System®** must be assessed on www.decoral-system.com. (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.

Pino Vintage

L' idoneità all'impiego in esterno degli abbinamenti tra **prodotti vernicianti poliuretanici Decoral System®** e **film sublimatici Decoral System®** dovrà essere valutata sul sito internet www.decoral-system.com (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.

MRK-005-0744



Powder Coating: DS 733 + Heat Transfer Film: 2120/01



Powder Coating: MirrorL-183S + Heat Transfer Film: 2120/03


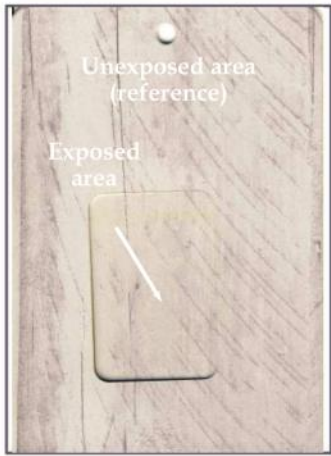



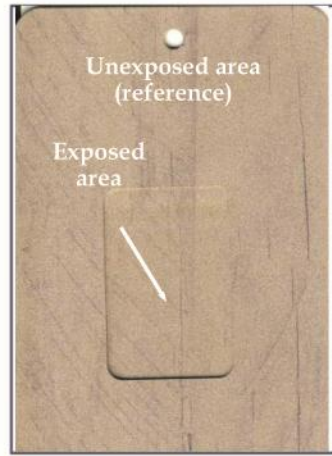
Powder Coating: 8G-148-A009 + Heat Transfer Film: 2120/03


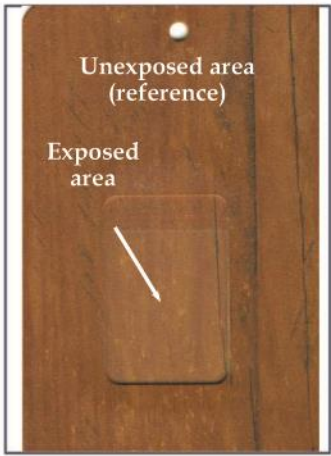



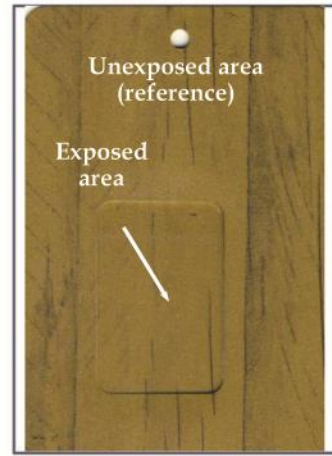
Powder Coating: DS 739 + Heat Transfer Film: 2120/06

Pino Vintage

Test Report: Accelerated Weathering Test		 Decoral LAB Research and Development		114
Laboratory Test	No. 472	Device: Sol 3000RH	Total duration: 1170 h	
 <p>Unexposed area (reference) Exposed area</p>				
LAB. ID NUMBER: 40750 POWDER COATING: MirrorL-183S HEAT TRANSFER FILM: 2120/03 Colour Variation (ΔE): 0,58 residual gloss: 92%				
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1170 hours.		Technical Opinion: Suitable for OUTDOOR USE		
<small>Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.</small>				
Mod_TR_01_rev03 Laboratory Decoral System Date: 05/12/2016 ID Report: TR-IA-114-2016				

Test Report: Accelerated Weathering Test		 Decoral LAB Research and Development		113
Laboratory Test	No. 472	Device: Sol 3000RH	Total duration: 1170 h	
 <p>Unexposed area (reference) Exposed area</p>				
LAB. ID NUMBER: 40749 POWDER COATING: 8G-148-A009 HEAT TRANSFER FILM: 2120/03 Colour Variation (ΔE): 0,63 residual gloss: 90%				
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1170 hours.		Technical Opinion: Suitable for OUTDOOR USE		
<small>Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.</small>				
Mod_TR_01_rev03 Laboratory Decoral System Date: 05/12/2016 ID Report: TR-IA-113-2016				

Test Report: Accelerated Weathering Test		 Decoral LAB Research and Development		110
Laboratory Test	No. 472	Device: Sol 3000RH	Total duration: 1170 h	
 <p>Unexposed area (reference) Exposed area</p>				
LAB. ID NUMBER: 40746 POWDER COATING: DS 739 HEAT TRANSFER FILM: 2120/06 Colour Variation (ΔE): 1,5 residual gloss: 69%				
Technical Remarks Good residual gloss and low colour variation (ΔE), after 1170 hours.		Technical Opinion: Suitable for OUTDOOR USE		
<small>Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.</small>				
Mod_TR_01_rev03 Laboratory Decoral System Date: 05/12/2016 ID Report: TR-IA-110-2016				

Test Report: Accelerated Weathering Test		 Decoral LAB Research and Development		109
Laboratory Test	No. 472	Device: Sol 3000RH	Total duration: 1170 h	
 <p>Unexposed area (reference) Exposed area</p>				
LAB. ID NUMBER: 40745 POWDER COATING: DS 733 HEAT TRANSFER FILM: 2120/01 Colour Variation (ΔE): 1,33 residual gloss: 91%				
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1170 hours.		Technical Opinion: Suitable for OUTDOOR USE		
<small>Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.</small>				
Mod_TR_01_rev03 Laboratory Decoral System Date: 05/12/2016 ID Report: TR-IA-109-2016				