





Suitability for outdoor use of different combinations between polyurethane Decorall System® Powder coatings and heat transfer film Decorall System® must be assessed on www.decorall-system.com. (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.

IVORY

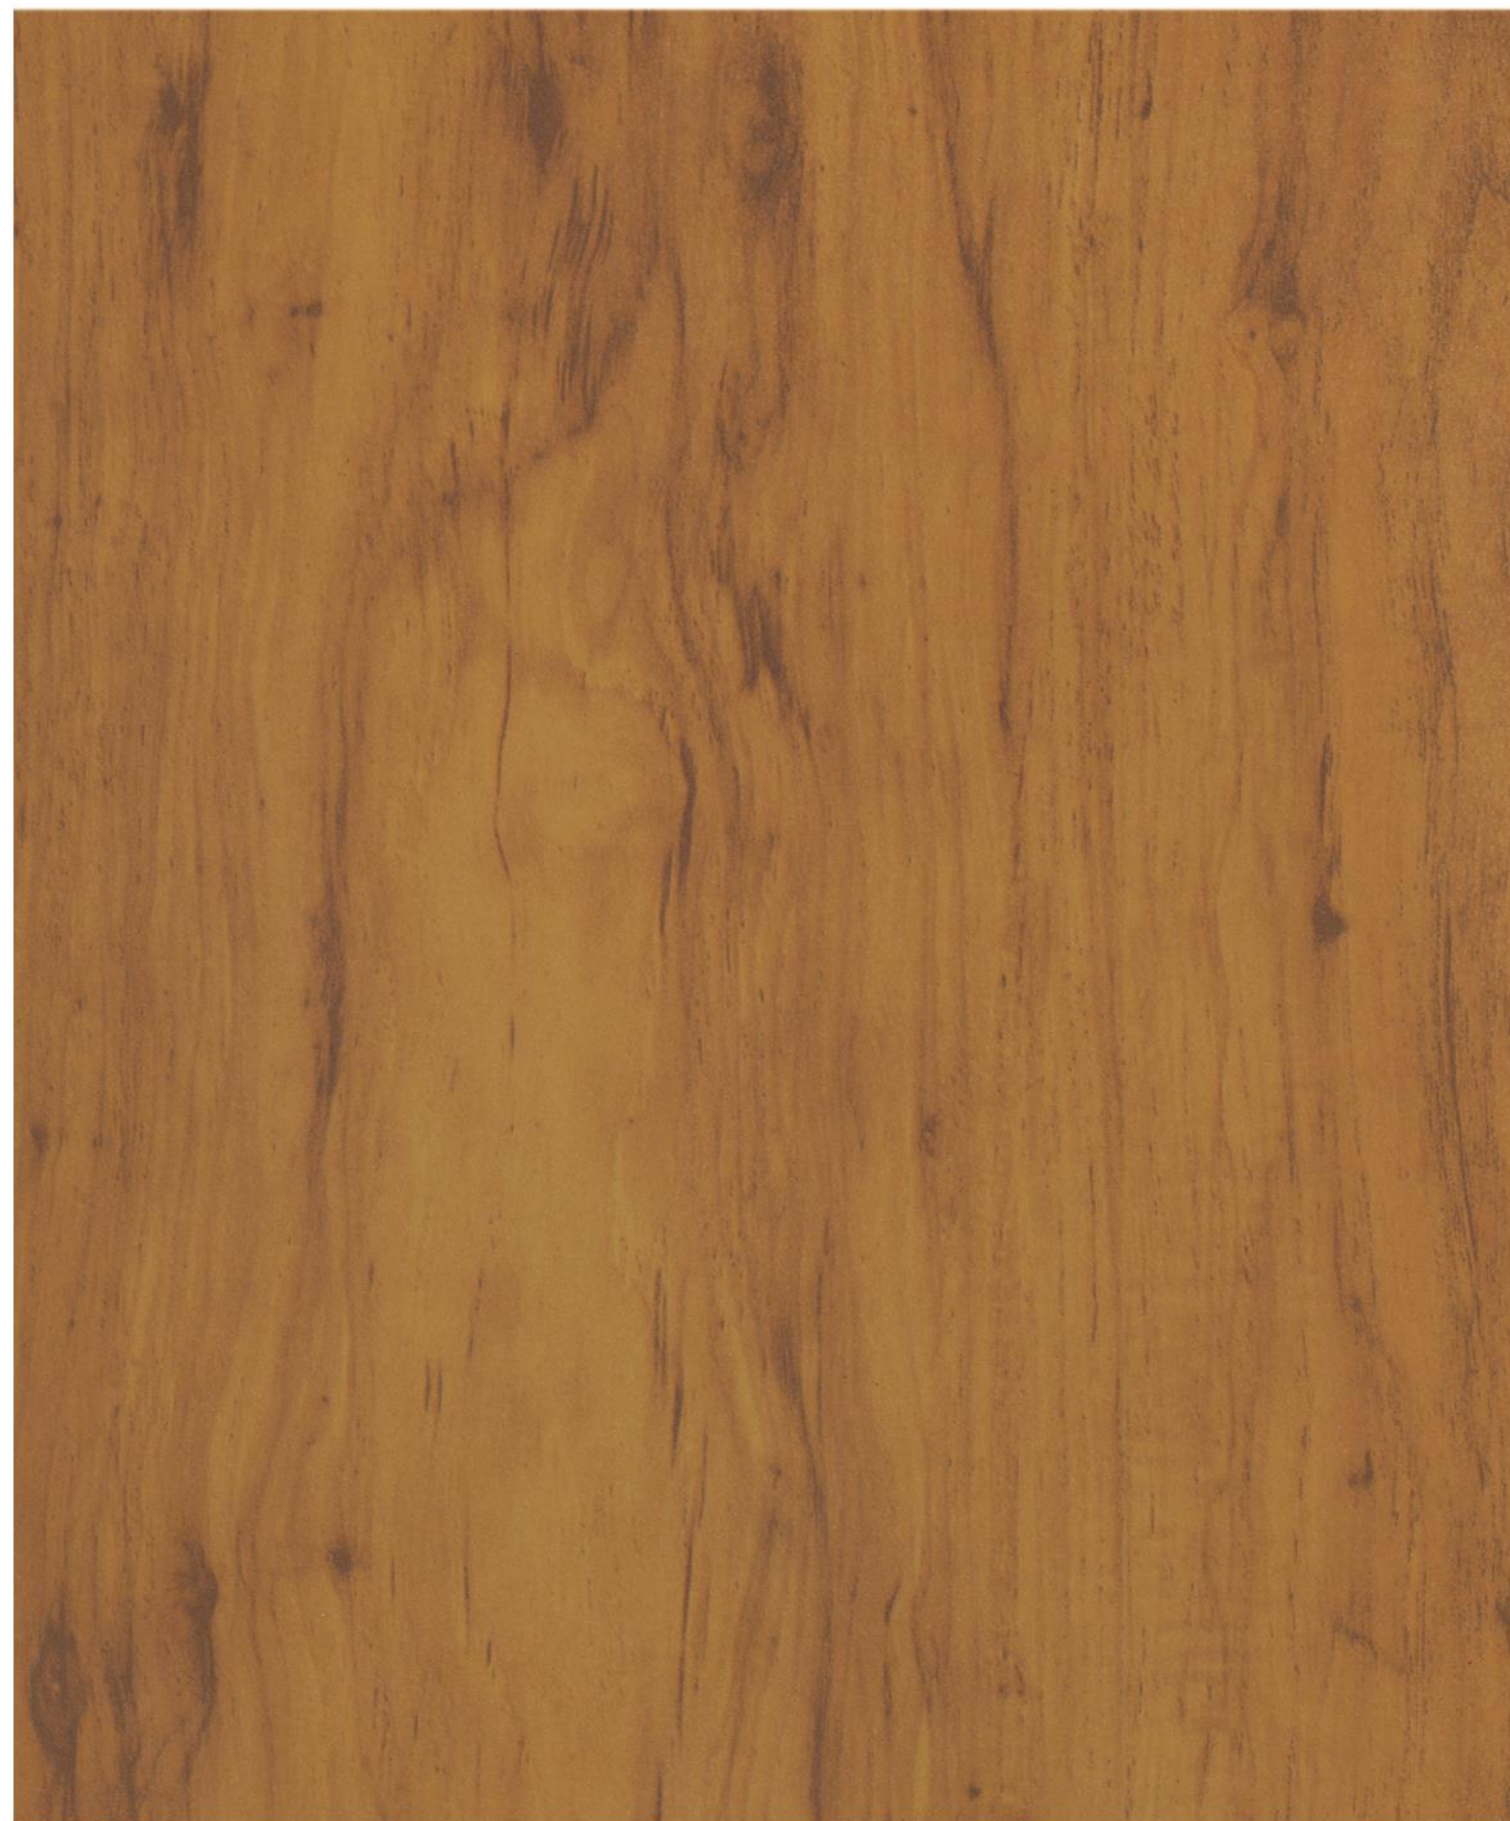

Powder Coating: DS-0716S + Heat Transfer Film: 2901/07

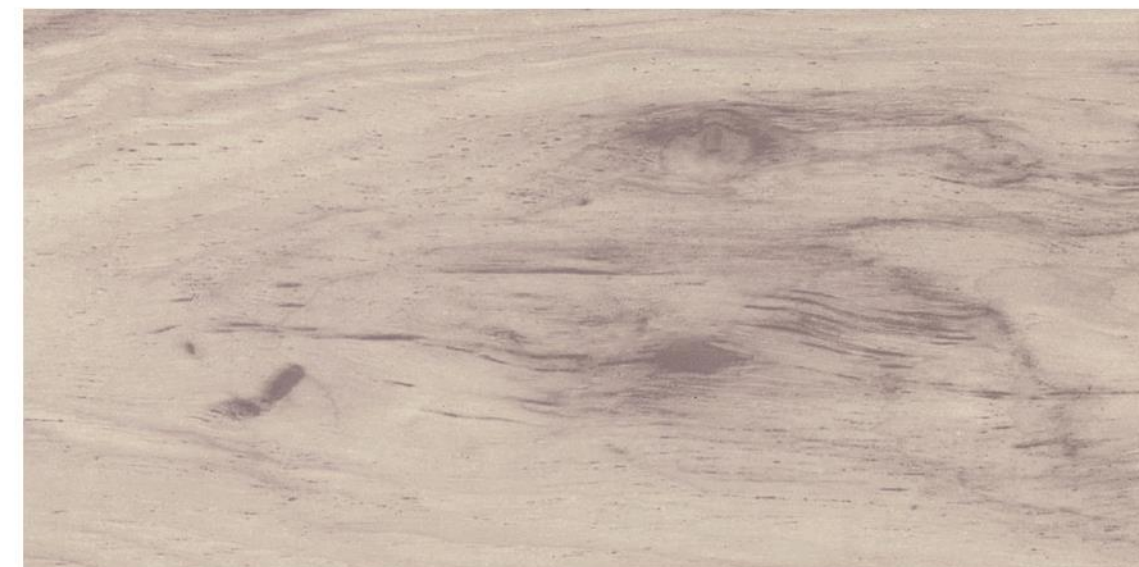

Powder Coating: DS 745 + Heat Transfer Film: 2901/10



Powder Coating: DS 733 + Heat Transfer Film: 2901/07



Powder Coating: DS-0721S + Heat Transfer Film: 2901/06





L' idoneità all' impiego in esterno degli abbinamenti tra prodotti vernicianti poliuretanici Decorall System® e film sublimatici Decorall System® dovrà essere valutata sul sito internet www.decorall-system.com (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.





MRK-005-0751







Viale del Lavoro, 5 - 37040 Arcole (VR)
Tel. +39 045 7639111 - Fax +39 045 7639100
info@decorall-system.com - www.decorall-system.com

IVORY

Test Report: Florida Natural Exposure		Decoral LAB Research and Development	143
 Florida Test	 Total duration: 12 months	 <p>Unexposed area (reference)</p> <p>Exposed area</p>	
 EXPOSURE PERIOD: FROM: 23/05/2014 TO: 27/05/2015			
LAB. ID NUMBER: 34048 POWDER COATING: DS-0721S HEAT TRANSFER FILM: 2901/06 Colour variation (ΔE): 0,92 residual gloss: 97%			
Technical Remarks Excellent residual gloss and low colour variation (ΔE).			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.			
QUALIDECO REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye, with a maximum value of 4 on the grey scale (ISO 105-A02).			
Mod_TR_02_rev02		Laboratory Decoral System	Date: 19/10/2015 ID Report: TR-NE-143-2015

Test Report: Florida Natural Exposure		Decoral LAB Research and Development	127
 Florida Test	 Total duration: 12 months	 <p>Unexposed area (reference)</p> <p>Exposed area</p>	
 EXPOSURE PERIOD: FROM: 23/05/2014 TO: 27/05/2015			
LAB. ID NUMBER: 33949 POWDER COATING: DS 733 HEAT TRANSFER FILM: 2901/07 Colour variation (ΔE): 1,42 residual gloss: 82%			
Technical Remarks Excellent residual gloss and low colour variation (ΔE).			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.			
QUALIDECO REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye, with a maximum value of 4 on the grey scale (ISO 105-A02).			
Mod_TR_02_rev02		Laboratory Decoral System	Date: 16/07/2015 ID Report: TR-NE-127-2015

Test Report: Florida Natural Exposure		Decoral LAB Research and Development	17
 Florida Test	 Total duration: 12 months	 <p>Unexposed area (reference)</p> <p>Exposed area</p>	
 EXPOSURE PERIOD: FROM: 27/11/2015 TO: 19/12/2016			
LAB. ID NUMBER: 38466 POWDER COATING: DS-0716S HEAT TRANSFER FILM: 2901/07 Colour variation (ΔE): 2,34 residual gloss: 89%			
Technical Remarks Good residual gloss and low colour variation (ΔE).			
Technical Opinion: Suitable for OUTDOOR USE			
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.			
QUALICOAT REQUIREMENTS The residual gloss shall be at least 50% of the original gloss. The ΔE values shall not exceed the maximum values prescribed in the annexed table (see Appendix A7 of Qualicoat Specifications).			
Mod_TR_02_rev02		Laboratory Decoral System	Date: 23/02/2017 ID Report: TR-NE-17-2017