


Suitability for outdoor use of different combinations between polyurethane Decoral System<sup>®</sup> Powder coatings and heat transfer film Decoral System<sup>®</sup> must be assessed on [www.decoral-system.com](http://www.decoral-system.com). (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.

Brazilian cherry



*Powder Coating: DS-0716S + Heat Transfer Film: 1447/01*

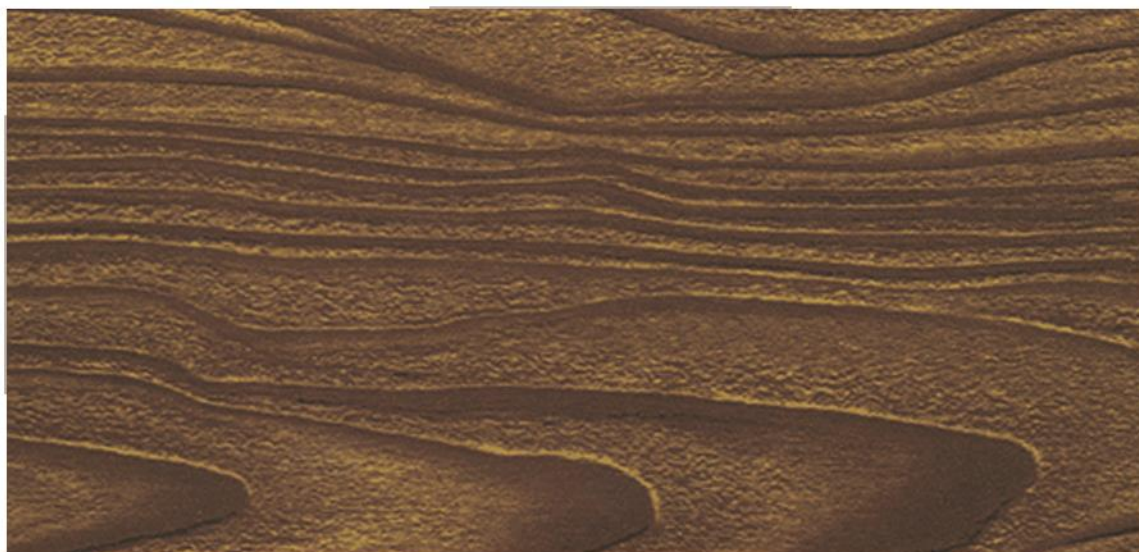


*Powder Coating: MIRROR-107S + Heat Transfer Film: 1447/01*



- *Powder Coating: DS 775 + Heat Transfer Film: 1447/01*



*Powder Coating: DS 706 + Heat Transfer Film: 1447/01*

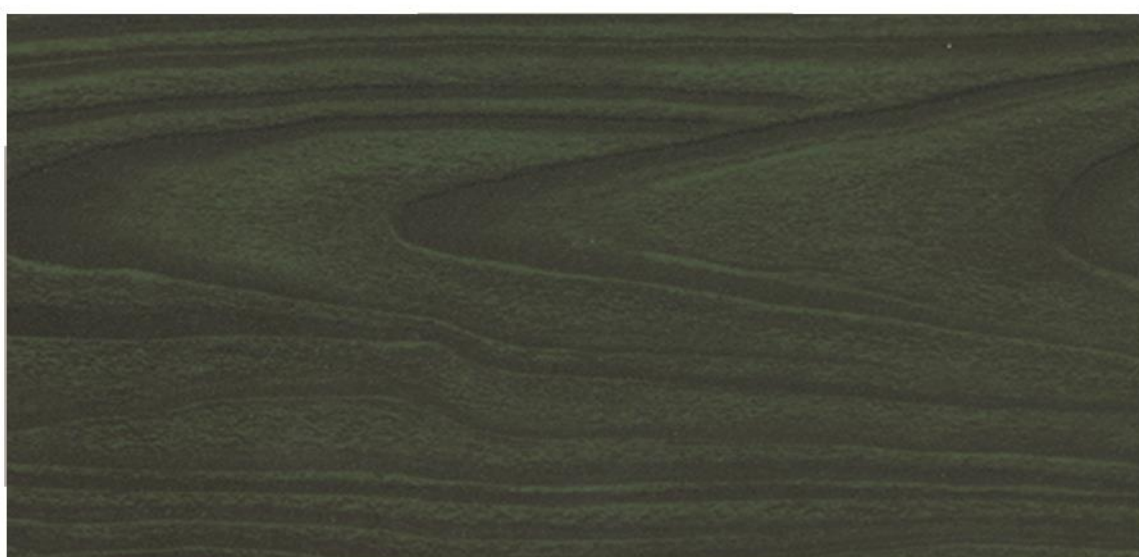

*Powder Coating: DS 770 + Heat Transfer Film: 1447/01*



*Powder Coating: DS-0739S + Heat Transfer Film: 1447/01*

L' idoneità all'impiego in esterno degli abbinamenti tra prodotti vernicianti poliuretani Decoral System<sup>®</sup> e film sublimatici Decoral System<sup>®</sup> dovrà essere valutata sul sito internet [www.decoral-system.com](http://www.decoral-system.com) (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**310**

Laboratory Test No. 627 Device: QSun 3000 Total duration: 1219h

Unexposed area (reference)  
Exposed area

LAB. ID NUMBER: 51995  
POWDER COATING: DS-07165  
HEAT TRANSFER FILM: 1447/01  
Colour Variation (ΔE): 1,32  
residual gloss: 99%

**Technical Remarks**  
Excellent residual gloss and normal colour variation (ΔE), after 1219 hours.

**Technical Opinion:**  
Suitable for **OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_rev03 Laboratory Decoral System Date: 06/11/2022 ID Report: TR-IA-310-2022

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**321**

Laboratory Test No. 627 Device: QSun 3000 Total duration: 1219h

Unexposed area (reference)  
Exposed area

LAB. ID NUMBER: 52007  
POWDER COATING: DS 770  
HEAT TRANSFER FILM: 1447/01  
Colour Variation (ΔE): 1,12  
residual gloss: 99%

**Technical Remarks**  
Excellent residual gloss and normal colour variation (ΔE), after 1219 hours.

**Technical Opinion:**  
Suitable for **OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_rev03 Laboratory Decoral System Date: 06/11/2022 ID Report: TR-IA-321-2022

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**319**

Laboratory Test No. 627 Device: QSun 3000 Total duration: 1219h

Unexposed area (reference)  
Exposed area

LAB. ID NUMBER: 52005  
POWDER COATING: DS 705  
HEAT TRANSFER FILM: 1447/01  
Colour Variation (ΔE): 1,59  
residual gloss: 99%

**Technical Remarks**  
Sufficient residual gloss and normal colour variation (ΔE), after 1219 hours.

**Technical Opinion:**  
Suitable for **OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_rev03 Laboratory Decoral System Date: 06/11/2022 ID Report: TR-IA-319-2022

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**316**

Laboratory Test No. 627 Device: QSun 3000 Total duration: 1219h

Unexposed area (reference)  
Exposed area

LAB. ID NUMBER: 52001  
POWDER COATING: DS-07395  
HEAT TRANSFER FILM: 1447/01  
Colour Variation (ΔE): 1,65  
residual gloss: 100%

**Technical Remarks**  
Excellent residual gloss and normal colour variation (ΔE), after 1219 hours.

**Technical Opinion:**  
Suitable for **OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_rev03 Laboratory Decoral System Date: 06/11/2022 ID Report: TR-IA-316-2022

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**322**

Laboratory Test No. 627 Device: QSun 3000 Total duration: 1219h

Unexposed area (reference)  
Exposed area

LAB. ID NUMBER: 52009  
POWDER COATING: MIRROR-1075  
HEAT TRANSFER FILM: 1447/01  
Colour Variation (ΔE): 1,01  
residual gloss: 96%

**Technical Remarks**  
Excellent residual gloss and normal colour variation (ΔE), after 1219 hours.

**Technical Opinion:**  
Suitable for **OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_rev03 Laboratory Decoral System Date: 06/11/2022 ID Report: TR-IA-322-2022

**Test Report:**  
Accelerated  
Weathering Test

**Decoral LAB**  
Research and Development

**320**

Laboratory Test No. 627 Device: QSun 3000 Total duration: 1219h

Unexposed area (reference)  
Exposed area

LAB. ID NUMBER: 52006  
POWDER COATING: DS 775  
HEAT TRANSFER FILM: 1447/01  
Colour Variation (ΔE): 1,01  
residual gloss: 98%

**Technical Remarks**  
Good residual gloss and normal colour variation (ΔE), after 1219 hours.

**Technical Opinion:**  
Suitable for **OUTDOOR USE**

Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers. However, the resistance against accelerated weathering test is only one of the conditions necessary for the evaluation of the resistance of the finished product. For a final assessment see further analysis on natural exposure in Florida.

Mod\_TR\_01\_rev03 Laboratory Decoral System Date: 06/11/2022 ID Report: TR-IA-320-2022

Brazilian  
cherry