

Dedicated marketing material:

- MRK-005-0045R2



- MRK-005-00



- MRK-005-0016R3



- MRK-005-0032



Marchi di qualità registrati di Decoral System®



DECORAL SYSTEM SRL

Viale del Lavoro, 5 - Arcole 37040 (Verona) ITALY - Tel. +39 045 7639111 - Fax +39 045 7639100

Email: info@decoral-system.com - Website: www.decoral-system.com

TECHNICAL TOOLS

Laboratory Tests and Technical Documentation

**SERIE 8G-XXX-A005
(DS 7XX)**

Textured powder-coatings



Information:

1. *Product Features*
2. *Technical information*
3. *Variants and special formulations*
4. *Sublimation*
5. *Possible usage and applications*

1. Product features

The powders of the 8G-XXX-A001 series (previous code: DS 7XX) are characterized by a textured surface (gloss 8±3).

A large variety of colours is available for this series, and they are valorised at their best when decorated with heat-transfer technology.



Sunscreens coated with textured powder-coatings and decorated with heat-transfer technology (wood effect)

2. Technical information

- Technical data's

Powder type	Polyurethane
Class resistance	Class 1
Yield (in surface/mass)	13,1 m ² /Kg
Specific weight	1,27 ± 0,03 g/cm ³

- Application and curing cycle

Available for corona charging or disco application.

Curing time and temperature: 20 minutes at 200°C – 302°F (metal temperature).

Reccomended thickness: 60 microns – yield 13,1 m²/Kg,
 70 microns – yield 11,2 m²/kg,
 80 microns – yield 9,8 m²/kg.

- Mechanical properties

Test	Standard reference	Result
Buchholz hardness	ISO 2815	ok
Cross-cut	ISO 2409	no loss of adhesion; ok
Bending	ISO 1519	no loss of adhesion; ok
Salt spray	ISO 9227	corrosion <4 mm; ok


3. Variants and special formulations

Several variants for this series are available. It is possible to produce it:

- Superdurable (class 2);
- Antimicrobial;
- Low-cure (20 minutes at 190°C);
- For bending;
- Different gloss and pigmentation.

4. Sublimation

Heat-transfer technology allows to expand the number of decorative solutions: by matching the decors of heat-transfer films with the powder coating bases we can both reach highly realistic wood effects as well as original and striking solutions.

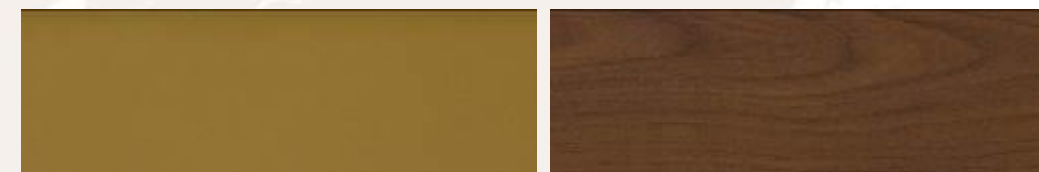

DS 733 base and DS 733 decorated with heat-transfer film 1406/01

5. Possible usage

The powders of the 8G-XXX-A001 series represent a perfect solution for the imitation of textured wooden surfaces, and allow to obtain very realistic results with a special reflection of the light.

