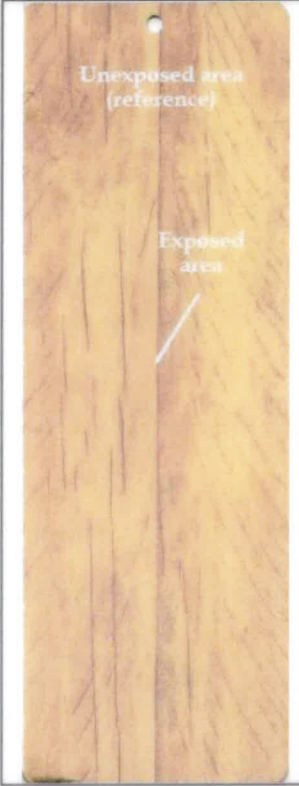
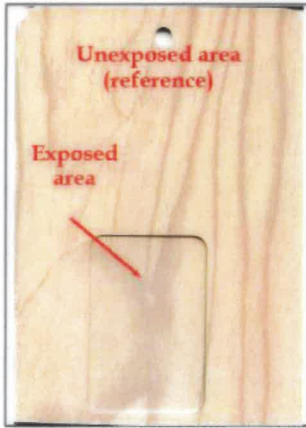



Light Maple Wood

Test Report: Florida Natural Exposure		Decoral LAB Research and Development		124
Florida Test	Total duration: 12 months			
EXPOSURE PERIOD: FROM: 10/08/2022 TO: 10/08/2023				
LAB. ID NUMBER: 50700 POWDER COATING: D9-07529 HEAT TRANSFER FILM: 2513/19 colour variation (ΔE): 1,85 residual gloss: 70%				
Technical Remarks Good residual gloss and normal color variation (ΔE).				
Technical Opinion: Suitable for OUTDOOR USE				
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.				
REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye				
Mod_TR_02_rev02 Laboratory Decoral System Date: 06/02/2024 ID Report: TR-NE-124-2024				

Test Report: Florida Natural Exposure		Decoral LAB Research and Development		125
Florida Test	Total duration: 12 months			
EXPOSURE PERIOD: FROM: 31/07/2023 TO: 22/08/2024				
LAB. ID NUMBER: 54991 POWDER COATING: D9 752 HEAT TRANSFER FILM: 2120/05 Colour variation (ΔE): 1,10 residual gloss: 89%				
Technical Remarks Good residual gloss and normal colour variation (ΔE).				
Technical Opinion: Suitable for OUTDOOR USE				
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.				
REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye				
Mod_TR_02_rev02 Laboratory Decoral System Date: 19/06/2025 ID Report: TR-NE-125-2025				

Test Report: Accelerated Weathering Test		Decoral LAB Research and Development		127
Laboratory Test	No. 562	Device: Solar 3000w	Total duration: 1226 h	
EXPOSURE PERIOD: FROM: 10/08/2022 TO: 10/08/2023				
LAB. ID NUMBER: 46577 POWDER COATING: D5-07485 HEAT TRANSFER FILM: 2002/08 Colour Variation (ΔE): 0,71 residual gloss: 98%				
Technical Remarks Excellent residual gloss and low colour variation (ΔE), after 1226 hours.				
Technical Opinion: Suitable for OUTDOOR USE				
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.				
REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye				
Mod_TR_01_rev03 Laboratory Decoral System Date: 04/11/2020 ID Report: TR-IA-127-2020				

Test Report: Florida Natural Exposure		Decoral LAB Research and Development		117
Florida Test	Total duration: 12 months			
EXPOSURE PERIOD: FROM: 10/08/2022 TO: 10/08/2023				
LAB. ID NUMBER: 52594 POWDER COATING: D9-07460 HEAT TRANSFER FILM: 2512/02 colour variation (ΔE): 1,99 residual gloss: 64%				
Technical Remarks Good residual gloss and normal color variation (ΔE).				
Technical Opinion: Suitable for OUTDOOR USE				
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.				
REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye				
Mod_TR_02_rev02 Laboratory Decoral System Date: 06/02/2024 ID Report: TR-NE-117-2024				

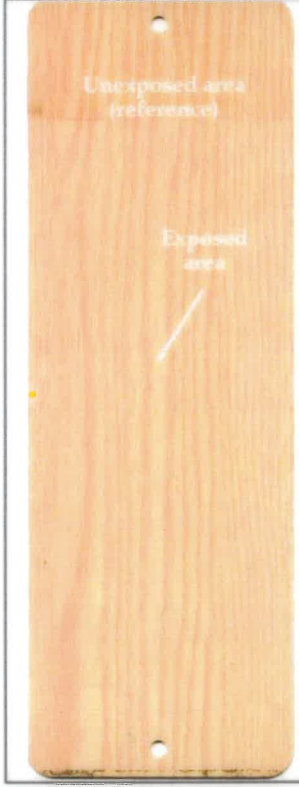Test Report: Florida Natural Exposure		Decoral LAB Research and Development		116
Florida Test	Total duration: 12 months			
EXPOSURE PERIOD: FROM: 04/06/2020 TO: 04/06/2021				
LAB. ID NUMBER: 46753 POWDER COATING: D9-07460 HEAT TRANSFER FILM: 2501/14 Colour variation (ΔE): 1,96 residual gloss: 60%				
Technical Remarks Good residual gloss and normal colour variation (ΔE).				
Technical Opinion: Suitable for OUTDOOR USE				
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.				
REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye				
Mod_TR_02_rev02 Laboratory Decoral System Date: 27/09/2021 ID Report: TR-NE-116-2021				

Test Report: Florida Natural Exposure		Decoral LAB Research and Development		352
Florida Test	Total duration: 12 months			
EXPOSURE PERIOD: FROM: 10/08/2022 TO: 10/08/2023				
LAB. ID NUMBER: 51085 POWDER COATING: D9 752 HEAT TRANSFER FILM: 1002/01 colour variation (ΔE): 0,81 residual gloss: 72%				
Technical Remarks Good residual gloss and low color variation (ΔE).				
Technical Opinion: Suitable for OUTDOOR USE				
Test was carried on samples prepared according to technical specifications supplied by raw materials manufacturers.				
REQUIREMENTS The residual gloss must be at least 50% of the original gloss. The final evaluation will be based on visual inspection with the naked eye				
Mod_TR_02_rev02 Laboratory Decoral System Date: 06/02/2024 ID Report: TR-NE-352-2024				

Suitability for outdoor use of different combinations between polyurethane Decorall System® Powder coatings and heat transfer film Decorall System® must be assessed on www.decorall-system.com. (link: **TESTED FOR OUTDOOR USE**) or contacting our laboratory.

Light Maple Wood

L' idoneità all'impiego in esterno degli abbinamenti tra prodotti vernicianti poliuretani Decorall System® e film sublimatici Decorall System® dovrà essere valutata sul sito internet www.decorall-system.com (alla voce **FINITURE ADATTE PER USO ESTERNO**) oppure contattando il nostro laboratorio.

MRK-005-1167



Powder Coating: DS 752 + Heat Transfer Film: 2120/03



Powder Coating: DS 752 + Heat Transfer Film: 1202/01



Powder Coating: DS-0752S + Heat Transfer Film: 2513/13



Powder Coating: DS-0746S + Heat Transfer Film: 2501/14



Powder Coating: DS-0746S + Heat Transfer Film: 2512/02



Powder Coating: DS-0746S + Heat Transfer Film: 2602/08