
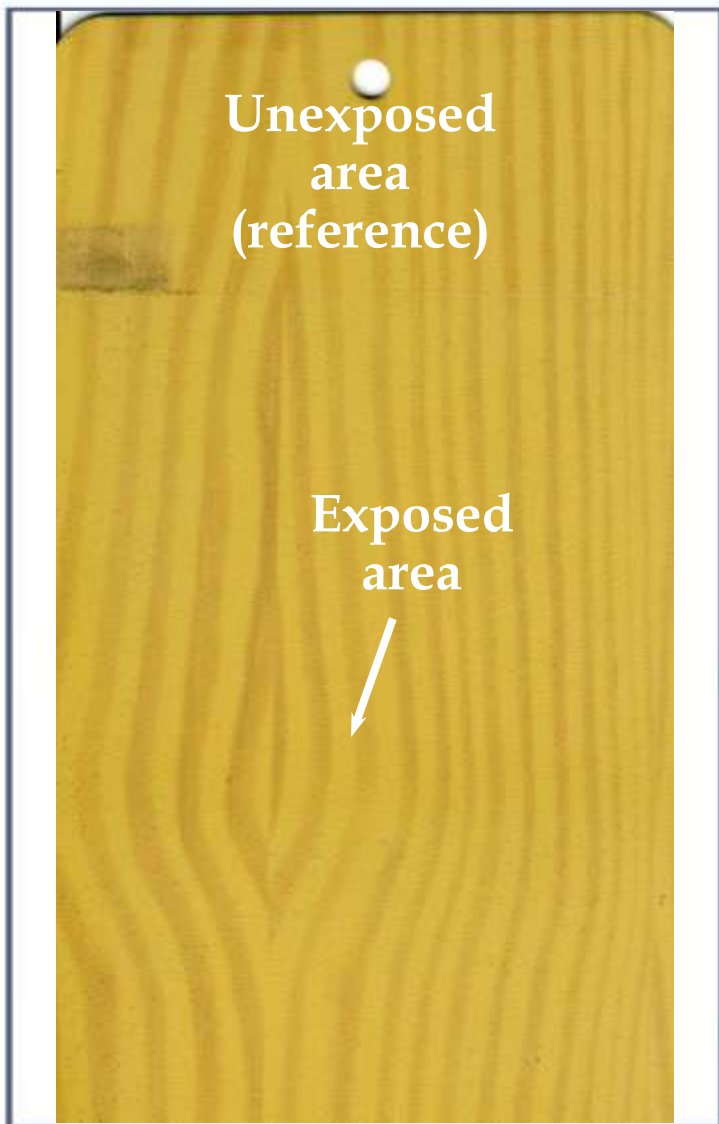
 **Florida
Test**


 **Total duration:
12 months**


 From **22/06/2012 to 21/06/2013**



 **Florida
Test**

 **Total duration:
36 months**

 From **22/06/2012 to 25/06/2015**

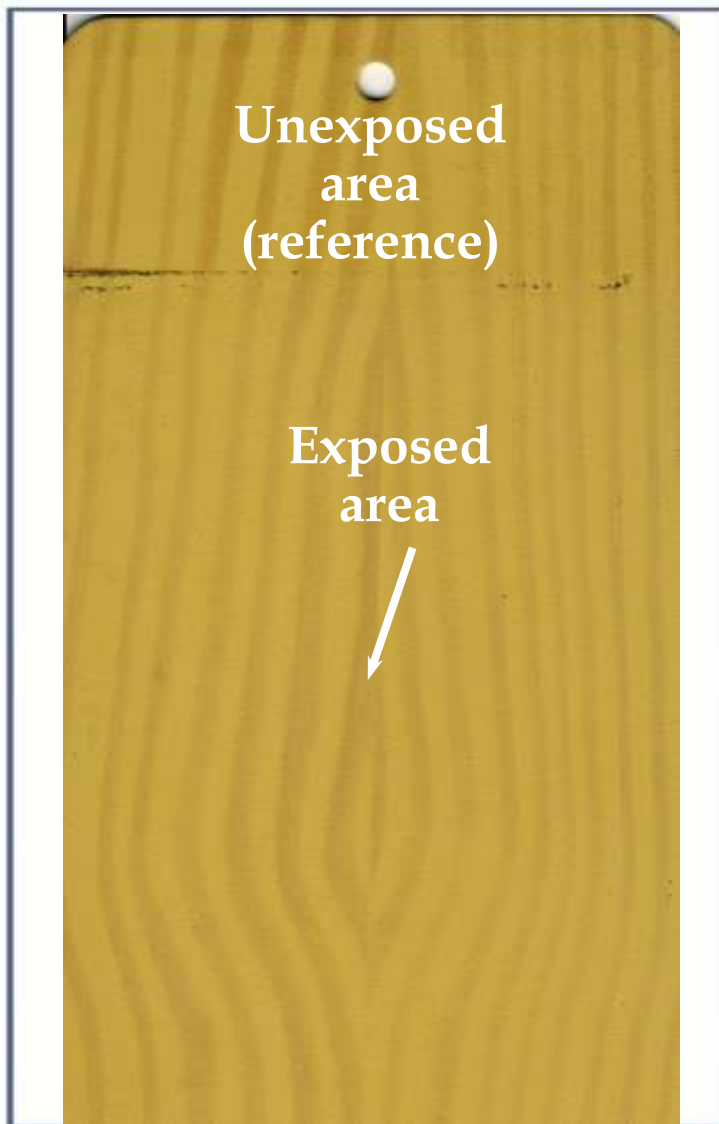

LAB. ID NUMBER: 25888
POWDER COATING: DS-0716S
HEAT TRANSFER FILM: 82102/01 L4
Colour variation (ΔE): 1,06
residual gloss: 94%

Approved
combination:


LAB. ID NUMBER: 25993
POWDER COATING: DS-0716S
HEAT TRANSFER FILM: 82102/01 L4
Colour variation (ΔE): 2,11
residual gloss: 55%

QUALICOAT REQUIREMENTS
The residual value shall be at least 75% of the original gloss.
The ΔE values not greater than 65% of the limits in the table
(see Appendix A7 of Qualicoat Specifications).

QUALICOAT REQUIREMENTS
The residual value shall be at least 50% of the original gloss.
The ΔE values within the limits prescribed in the annexed
table (see Appendix A7 of Qualicoat Specifications).